


# OKS 473

## Fluid Grease

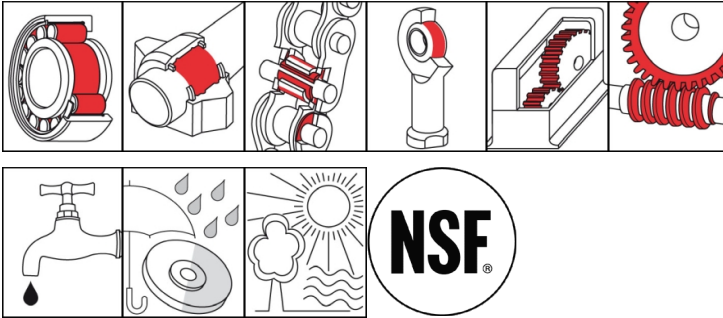

### Description

OKS 473 is a fluid grease for closed gears, rolling and friction bearings with minimal gearing play and high speeds, at low temperatures as well as low coasting torques.

### Applications

- For closed gear units and geared motors, plain and friction bearings even at higher rotating speeds, e.g. on filling and packaging machines
- For joints, propeller shafts and chains when grease lubrication is specified

### Branches

- Catering equipment and food processing technology
- Iron and steel industry
- Plant and machine (tool) engineering
- Glass and foundry industry
- Municipal services
- Shipbuilding and marine technology
- Logistics
- Chemical industry
- Rubber and plastic processing
- Rail vehicle technology
- Paper and packaging industry

### Advantages and benefits

- Toxicologically harmless as defined in German LFGB
- Formula in accordance the FDA guideline 21 CFR 178.3570
- NSF H1 registered
- Long operating times due to good resistance to oxidation and ageing
- Reduced wear due to highly adhesive, load-bearing lubricating film
- Excellent corrosion protection
- Low dynamic viscosity enables use with minimal bearing play and gear unit spaces
- Good pumpability with central lubricating systems
- Very high resistance to hot and cold water, watery-alkaline and acidic disinfectants and cleaning agents

### Application tips

For best results clean the lubricating point carefully, e.g. with OKS 2610/OKS 2611 Universal Cleaner. Remove the corrosion protection ahead of the initial filling. Fill gears in a way that all the functional surfaces for sure transport the grease. Fill bearings in a way that all the functional surfaces for sure get the grease. Observe the instructions of the gear- bearing or machine manufacturer. Relubrication with automatic lubrication system or with a brush or spatula. Relubrication intervals and amount to be defined acc. to the service conditions. If the removal of the old grease is not possible the amount of grease has to be limited to avoid excess lubrication of the bearing. At longer relubrication intervals a complete exchange of the old grease is recommended. Only mix with appropriate lubricants.

### Packaging

- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

# OKS 473

## Fluid Grease

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
thickener				aluminium-complex soap
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			GPHCOOK-40
marking	analogue to DIN 51 502			KPHCOOK-40
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	160
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	21
drop point	DIN ISO 2176		°C	> 220
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	0-00
worked penetration	DIN ISO 2137	60DH	0.1 mm	370-430
lower operating temperature			°C	-45
upper operating temperature			°C	120
colour				light yellow
density (at 20°C)	DIN 51 757		g/cm <sup>3</sup>	0.85
DN value (dm x n)			mm/min	500,000
FZG wear protection test	DIN 51 354 T2	A2/76/50	power level	11
<b>Properties and approvals</b>				
approval for food processing technology				<a href="#">NSF H1, Reg.-Nr. 140485</a>

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 +49 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.